
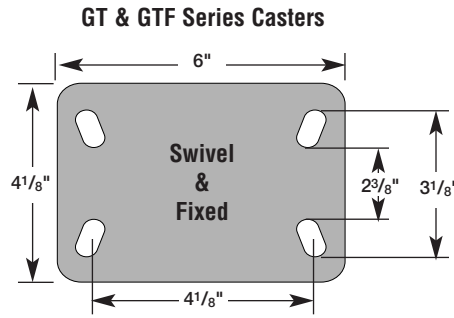


GT SERIES & GTF SERIES

The Flexello GF Series swivel and GTF Series fixed casters are available in sizes ranging from 6" to 10" with load capacities from 814 to 2,200 lbs. Featuring a rugged kingpinless design, these casters are ideal for handling power towing applications. Wheel options include Rubber on Cast Iron, Flexello Polyurethane on Cast Iron, Cast Iron and Phenolic for a variety of average-to-optimum working floor conditions.

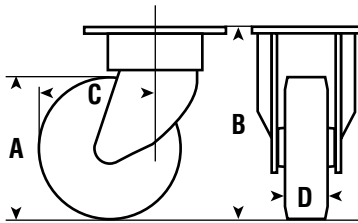

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

GT & GTF SERIES

A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #
6"	8"	5-7/8"	1-3/4"	814	Roller	Rubber on Cast Iron	GT-6RTB	GTF-6RT
6"	8"	5-7/8"	1-3/4"	814	Ball Journal	Rubber on Cast Iron	GT-6RTBJ	GTF-6RTBJ
6"	8"	5-7/8"	1-3/4"	1386	Roller	Polyurethane on Cast Iron	GT-6SUB	GTF-6SUB
6"	8"	5-7/8"	1-3/4"	1386	Ball Journal	Polyurethane on Cast Iron	GT-6SUBJ	GTF-6SUBJ
6"	8"	5-7/8"	1-3/4"	1386	Taper Roller	Polyurethane on Cast Iron	GT-6SUTM	GTF-6SUTM
6"	8"	5-7/8"	1-3/4"	1200	Roller	Phenolic	GT-6ANB	GTF-6ANB
6"	8"	5-7/8"	1-3/4"	1804	Roller	Cast Iron	GT-6CIB	GTF-6CIB
8"	10"	7-1/4"	2"	1177	Roller	Rubber on Cast Iron	GT-8RTB	GTF-8RTB
8"	10"	7-1/4"	2"	1177	Ball Journal	Rubber on Cast Iron	GT-8RTBJ	GTF-8RTBJ
8"	10"	7-1/4"	2"	2090	Roller	Polyurethane on Cast Iron	GT-8SUB	GTF-8SUB
8"	10"	7-1/4"	2"	2090	Ball Journal	Polyurethane on Cast Iron	GT-8SUBJ	GTF-8SUBJ
8"	10"	7-1/4"	2"	2090	Taper Roller	Polyurethane on Cast Iron	GT-8SUTM	GTF-8SUTM
8"	10"	7-1/4"	2"	1400	Roller	Phenolic	GT-8ANB	GTF-8ANB
8"	10"	7-1/4"	1-3/4"	2000	Roller	Cast Iron	GT-8CIB	GTF-8CIB
10"	12"	7-3/8"	2"	1350	Roller	Rubber on Cast Iron	GT-10RTB	GTF-10RTB
10"	12"	7-3/8"	2"	1350	Ball Journal	Rubber on Cast Iron	GT-10RTBJ	GTF-10RTBJ
10"	12"	7-3/8"	2"	2200	Roller	Polyurethane on Cast Iron	GT-10SUB	GTF-10SUB
10"	12"	7-3/8"	2"	2200	Ball Journal	Polyurethane on Cast Iron	GT-10SUBJ	GTF-10SUBJ
10"	12"	7-3/8"	2"	2200	Taper Roller	Polyurethane on Cast Iron	GT-10SUTM	GRF-10SUTM
10"	12"	7-3/8"	2"	2200	Roller	Cast Iron	GT-10CIB	GTF-10CIB

Foot Brakes

A foot brake is available for the GT Series caster in 8" and 10" diameters with Rubber-on-Cast-Iron or a Polyurethane-on-Cast-Iron wheel. The swivel radius is increased to 6" on 6" diameter wheels only. To order a foot brake, add suffix **BR** to the Swivel Part #.

2-Way Directional Wheel Lock

A two-way directional wheel lock is available to convert the GT Series swivel caster to a fixed caster by the release of a spring-loaded plunger. The locked direction of travel is in line with the longer side of the top plate. To order a directional lock, add suffix **L** to the Swivel Part #.



GT Series Swivel



GTF Series Fixed



GT Series 2-Way Directional Lock

