



1 SERIES

Kingpinless Pressed Steel

Ideally suited for moving light loads over flat surfaces, Revvo 1 Series swivel casters are available in three wheel sizes (1-5/8", 2" & 2-1/2") with load capacities ranging from 31 to 110 lbs. They can be fitted with rectangular top plates (TS1) or bolt hole style frames (BS1).

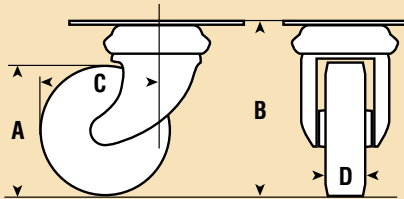

Standard Top Plate



TS1 top plates have fixing holes to suit 1/4" diameter bolts.

A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

1 SERIES							Top Plate
A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #
1-5/8"	2-1/2"	1-3/4"	5/8"	40	Plain	Nylon	TS1 040 NY01
1-5/8"	2-1/2"	1-3/4"	5/8"	31	Plain	Revvolute	TS1 040 RL01
2"	2-7/8"	1-7/8"	5/8"	110	Plain	Nylon	TS1 050 NY01
2"	2-7/8"	1-7/8"	5/8"	31	Plain	Revvolute	TS1 050 RL01
2-1/2"	3-3/8"	2-1/8"	5/8"	110	Plain	Nylon	TS1 063 NY01
2-1/2"	3-3/8"	2-1/8"	5/8"	35	Plain	Revvolute	TS1 063 RL01

1 SERIES							Bolt Hole
A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #
1-5/8"	2-3/8"	1-3/4"	5/8"	40	Plain	Nylon	BS1 040 NY01
1-5/8"	2-3/8"	1-3/4"	5/8"	31	Plain	Revvolute	BS1 040 RL01
2"	2-3/4"	1-7/8"	5/8"	110	Plain	Nylon	BS1 050 NY01
2"	2-3/4"	1-7/8"	5/8"	31	Plain	Revvolute	BS1 050 RL01
2-1/2"	3-3/8"	2-1/8"	5/8"	110	Plain	Nylon	BS1 063 NY01
2-1/2"	3-3/8"	2-1/8"	11/16"	35	Plain	Revvolute	BS1 063 RL01

BS1 bolt hole frames have a mounting center hole of 5/16".

Options & Accessories

See Page 8 for complete specifications, availability and ordering information

Item	Availability	Order Ref.
Threadguards	Swivel*	T
Foot Brake	Swivel (2" & 2-1/2")	B
Expanding Round Plugs	Bolt Hole	R
Expanding Steel Plugs	Bolt Hole	S
Sprung Plugs	Bolt Hole	S/A

* Threadguards only available for 1-5/8" & 2" models with Nylon wheels and 2" & 2-1/2" casters with Revvolute wheels



Bolt hole swivel style shown with nylon wheel and foot brake