



## 5 SERIES

### Kingpinless Pressed Steel

Ideally suited for moving moderate to heavy loads over flat surfaces, Revvo TS5 Series casters are available in three wheel sizes (6", 6-1/4" & 8") with load capacities ranging from 660 to 2,200 lbs. Swivel models (TS5/BS5) are fitted with head seals to prevent the ingress of dirt and dust into the swivel head. Fixed models (TF5) are fitted with oblong top plates. Please consult factory for load capacities of bolt hole models.


### Options & Accessories

See Page 8 for complete specifications, availability and ordering information


Item	Availability	Order Ref.
Threadguards	Swivel & Fixed*	T
Head Seals	Swivel (standard)	S
Wheel Lock	Swivel	W
Foot Brake	Swivel (6" & 8")	H
Swivel & Wheel Lock	Swivel (6" & 8")	L
Round Steel Plugs	Bolt Hole	RP

\* Threadguards are available for all 5 Series casters except models with Green Rubber wheels

Note: Head Seals are fitted standard on all top plate and bolt hole 5 Series swivel casters.

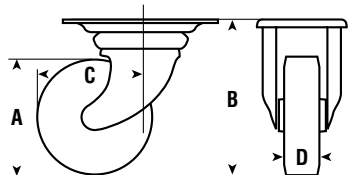

### Standard Top Plate

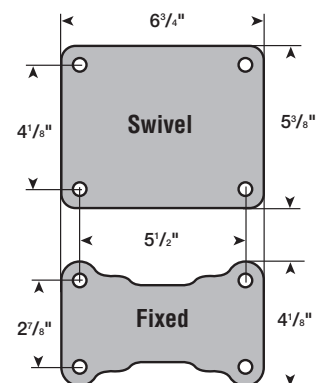

TS5/TF5 top plates have fixing holes to suit 3/8" diameter bolts.

BS5 bolt hole frames have a mounting center hole of 3/4".

A = Wheel Diameter    B = Overall Height    C = Swivel Radius    D = Tread Width

5 SERIES				TS5/TF5*			Top Plate		Bolt Hole
A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #	Swivel Part #
6"	8"	5-1/16"	1-1/2"	1100	Roller	Nylon	TS5 150 NY15	TF5 150 NY15	BS5 150 NY15
6"	8"	5-1/16"	1-1/2"	1760	Precision Ball	Nylon	TS5 150 NY2H	TF5 150 NY2H	BS5 150 NY2H
6"	8"	5-1/16"	2"	1200	Roller	Phenolic	TS5 150 RP1G	TF5 150 RP1G	BS5 150 RP1G
6"	8"	5-1/16"	1-3/4"	800	Roller	Rubber Tire	TS5 150 RU15	TF5 150 RU15	BS5 150 RU15
6"	8"	5-1/16"	1-3/4"	800	Precision Ball	Rubber Tire	TS5 150 RU2H	TF5 150 RU2H	BS5 150 RU2H
6"	8"	5-1/16"	1-1/2"	1600	Roller	Revvothane	TS5 150 PT15	TF5 150 PT15	BS5 150 PT15
6"	8"	5-1/16"	2"	750	Roller	Polypropylene	TS5 150 PL1G	TF5 150 PL1G	BS5 150 PL1G
6"	8"	5-1/16"	1-3/4"	2000	Roller	Cast Iron	TS5 150 CI15	TF5 150 CI15	BS5 150 CI15
6"	8"	5-1/16"	1-1/2"	1250	Roller	Polyurethane	TS5 150 PU1G	TF5 150 PU1G	BS5 150 PU1G
6 1/4"	8-3/16"	5-1/4"	1-5/8"	660	Precision Ball	Green Rubber	TS5 160 GR2H	TF5 160 GR2H	BS5 160 GR2H
8"	9-3/4"	6-1/16"	1-1/2"	1100	Roller	Nylon	TS5 200 NY15	TF5 200 NY15	BS5 200 NY15
8"	9-3/4"	6-1/16"	1-1/2"	2200	Precision Ball	Nylon	TS5 200 NY2H	TF5 200 NY2H	BS5 200 NY2H
8"	9-3/4"	6-1/16"	1-5/8"	880	Precision Ball	Green Rubber	TS5 200 GR2H	TF5 200 GR2H	BS5 200 GR2H
8"	9-3/4"	6-1/16"	2"	1400	Roller	Phenolic	TS5 200 RP1G	TF5 200 RP1G	BS5 200 RP1G
8"	9-3/4"	6-1/16"	2"	1175	Roller	Rubber Tire	TS5 200 RU15	TF5 200 RU15	BS5 200 RU15
8"	9-3/4"	6-1/16"	2"	1175	Precision Ball	Rubber Tire	TS5 200 RU2H	TF5 200 RU2H	BS5 200 RU2H
8"	9-3/4"	6-1/16"	1-3/4"	2200	Roller	Revvothane	TS5 200 PT15	TF5 200 PT15	BS5 200 PT15
8"	9-3/4"	6-1/16"	2"	1000	Roller	Polypropylene	TS5 200 PL1G	TF5 200 PL1G	BS5 200 PL1G
8"	9-3/4"	6-1/16"	1-3/4"	2200	Roller	Cast Iron	TS5 200 CI15	TF5 200 CI15	BS5 200 CI15
8"	9-3/4"	6-1/16"	2"	1925	Roller	Polyurethane	TS5 200 PU1G	TF5 200 PU1G	BS5 200 PU1G

\* Load capacities are shown for top plate models (TS5/TF5) only. Please consult factory for load capacities of individual bolt hole casters.