

# P SERIES

## Kingpinless Fabricated Steel


Revvo kingpinless top plate P Series casters incorporate two large case-hardened ball races and feature press-formed side plates for added durability when towing heavy loads up to 10 mph. They are available in four wheel sizes (6", 8", 10" & 12") with load capacities ranging from 810 to 4,400 lbs. Swivel models (TSP) are fitted with oblong top plates, and fixed models (TFP) are fitted with rectangular top plates. P Series casters are also available in special swivel (WSP) and fixed (WFP) models to accommodate wider wheels.




*P Series casters feature large-diameter, case-hardened ball races*



**Standard Top Plates**

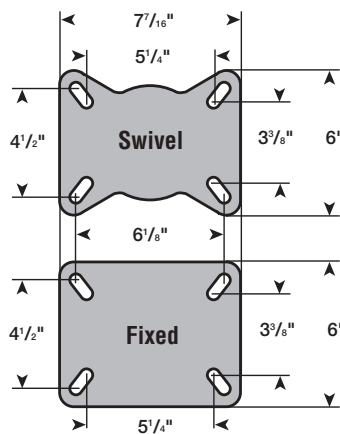

**Alternative ISO Top Plates**

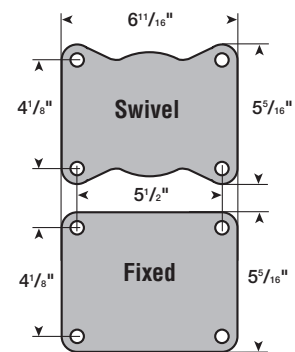


ISO top plates increase overall height by 1/8" and have fixing holes to suit 1/2" diameter bolts.  
To order, add suffix **ISO** to Swivel or Fixed Part #

TSP/TFP & WSP/WFP top plates are 10mm thick and have fixing holes to suit 1/2" diameter bolts.

## Options & Accessories


### Foot Brake (B)


- Available for swivel casters only
- Foot-operated pedal locks wheel
- To order, add suffix **B** to Swivel Part #



### Directional Lock (D)

- For swivel casters only
- A four-station plunger lock converts swivel casters into fixed casters for straight line travel
- To order, add suffix **D** to Swivel Part #






A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

**P SERIES**

A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #
6"	8-1/2"	5-1/4"	1-3/4"	810	Roller	Rubber Tire	TSP 150 RU15	TFP 150 RU15
6"	8-1/2"	5-1/4"	1-9/16"	810	Precision Ball	Rubber Tire	TSP 150 RU2H	TFP 150 RU2H
6"	8-1/2"	5-1/4"	1-1/2"	1500	Roller	Revvothane	TSP 150 PT15	TFP 150 PT15
6"	8-1/2"	5-1/4"	1-1/2"	1605	Precision Ball	Revvothane	TSP 150 PT2H	TFP 150 PT2H
6"	8-1/2"	5-1/4"	1-3/4"	2000	Roller	Cast Iron	TSP 150 CI15	TFP 150 CI15
6"	8-1/2"	5-1/4"	1-3/4"	2000	Precision Ball	Cast Iron	TSP 150 CI2H	TFP 150 CI2H
6"	8-1/2"	5-1/4"	2-1/8"	4400	Taper	Steel	TSP 150 STTP	TFP 150 STTP
8"	10-1/2"	6-3/4"	2"	1175	Roller	Rubber Tire	TSP 200 RU15	TFP 200 RU15
8"	10-1/2"	6-3/4"	2"	1175	Precision Ball	Rubber Tire	TSP 200 RU2H	TFP 200RU2H
8"	10-1/2"	6-3/4"	1-3/4"	2200	Roller	Revvothane	TSP 200 PT15	TFP 200 PT15
8"	10-1/2"	6-3/4"	1-3/4"	2200	Precision Ball	Revvothane	TSP 200 PT2H	TFP 200 PT2H
8"	10-1/2"	6-3/4"	1-3/4"	2525	Roller	Cast Iron	TSP 200 CI15	TFP 200 CI15
8"	10-1/2"	6-3/4"	1-3/4"	2525	Precision Ball	Cast Iron	TSP 200 CI2H	TFP 200 CI2H
8"	10-1/2"	6-3/4"	2-1/8"	4400	Taper	Steel	TSP 200 STTP	TFP 200 STTP
10"	12-1/2"	8-1/8"	2-1/8"	1350	Roller	Rubber Tire	TSP 250 RU1H	TFP 250 RU1H
10"	12-1/2"	8-1/8"	2-1/8"	1350	Precision Ball	Rubber Tire	TSP 250 RU2H	TFP 250 RU2H
10"	12-1/2"	8-1/8"	1-3/4"	2640	Roller	Revvothane	TSP 250 PT1H	TFP 250 PT1H
10"	12-1/2"	8-1/8"	1-3/4"	2640	Precision Ball	Revvothane	TSP 250 PT2H	TFP 250 PT2H
10"	12-1/2"	8-1/8"	2-1/8"	2725	Roller	Cast Iron	TSP 250 CI1H	TFP 250 CI1H
10"	12-1/2"	8-1/8"	2-1/8"	2725	Precision Ball	Cast Iron	TSP 250 CI2H	TFP 250 CI2H
12"	14-3/8"	9-5/8"	2-1/8"	1500	Precision Ball	Rubber Tire	TSP 300 RU2H	TFP 300 RU2H
12"	14-3/8"	9-5/8"	1-3/4"	3085	Precision Ball	Revvothane	TSP 300 PT 2H	TFP 300 PT2H
12"	14-3/8"	9-5/8"	2-1/4"	3965	Precision Ball	Revvothane	TSP 300 PT2C	TFP 300 PT2C



A = Wheel Diameter B = Overall Height C = Swivel Radius D = Tread Width

**WP SERIES - Wide Wheel**

A	B	C	D	Load Capacity	Bearing	Wheel	Swivel Part #	Fixed Part #
8"	10-1/2"	6-3/4"	3"	3965	Precision Ball	Revvothane	WSP 200 PT2P	WFP 200 PT2P
10"	12-1/2"	8-1/8"	3"	4400	Precision Ball	Revvothane	WSP 250 PT2P	WFP 250 PT2P
12"	14-3/8"	9-5/8"	3"	4400	Precision Ball	Revvothane	WSP 300 PT2P	WFP 300 PT2P

WP Series casters are designed to accommodate wider wheels